






4

3


2

1

REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		6/2/2020	ZAG

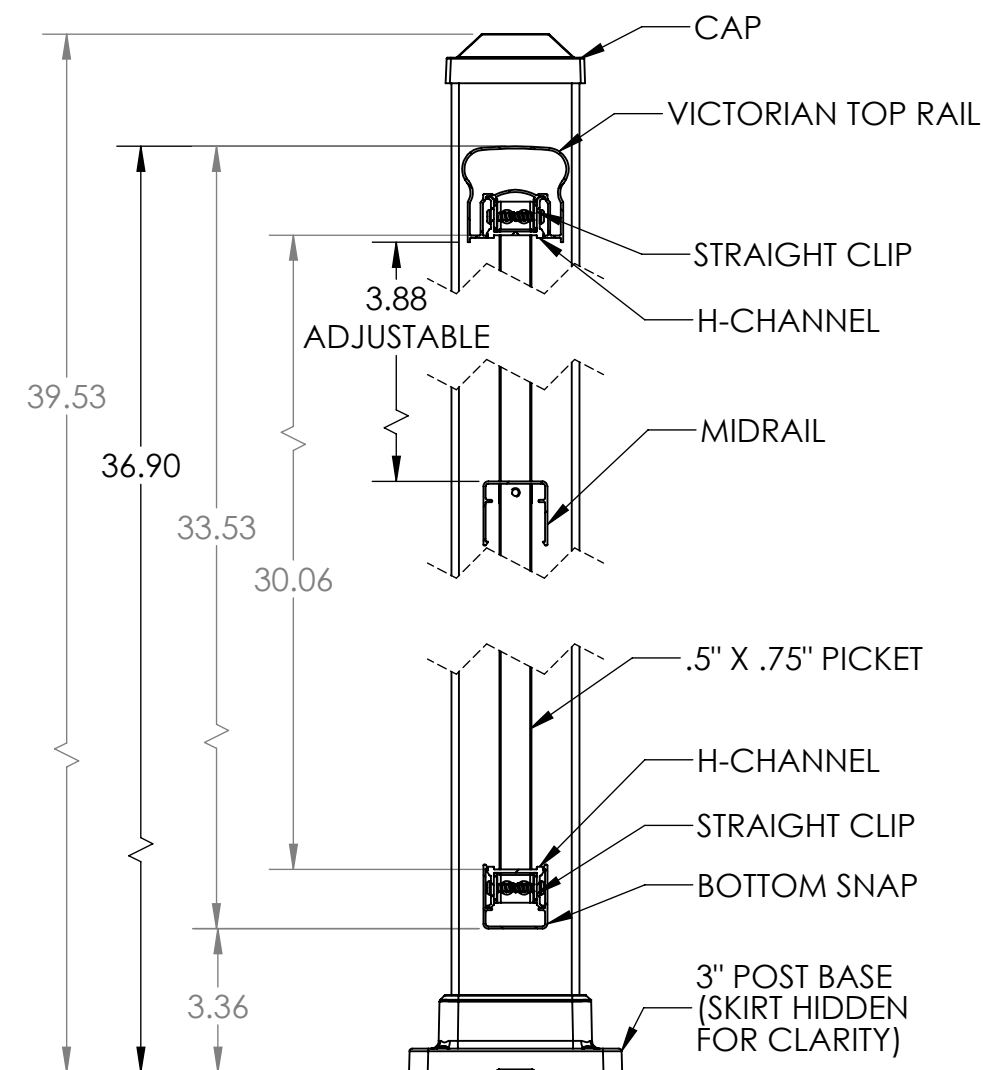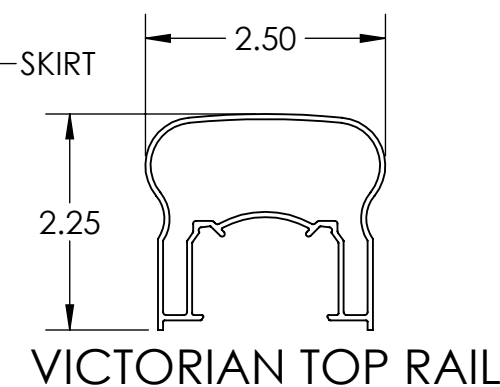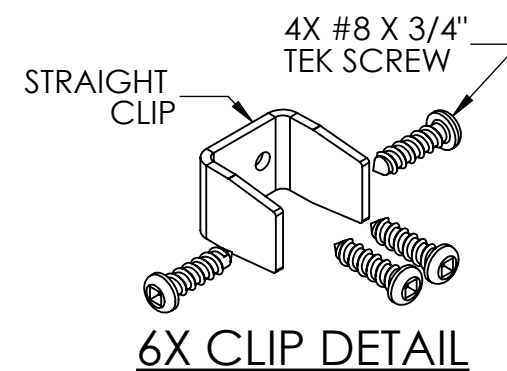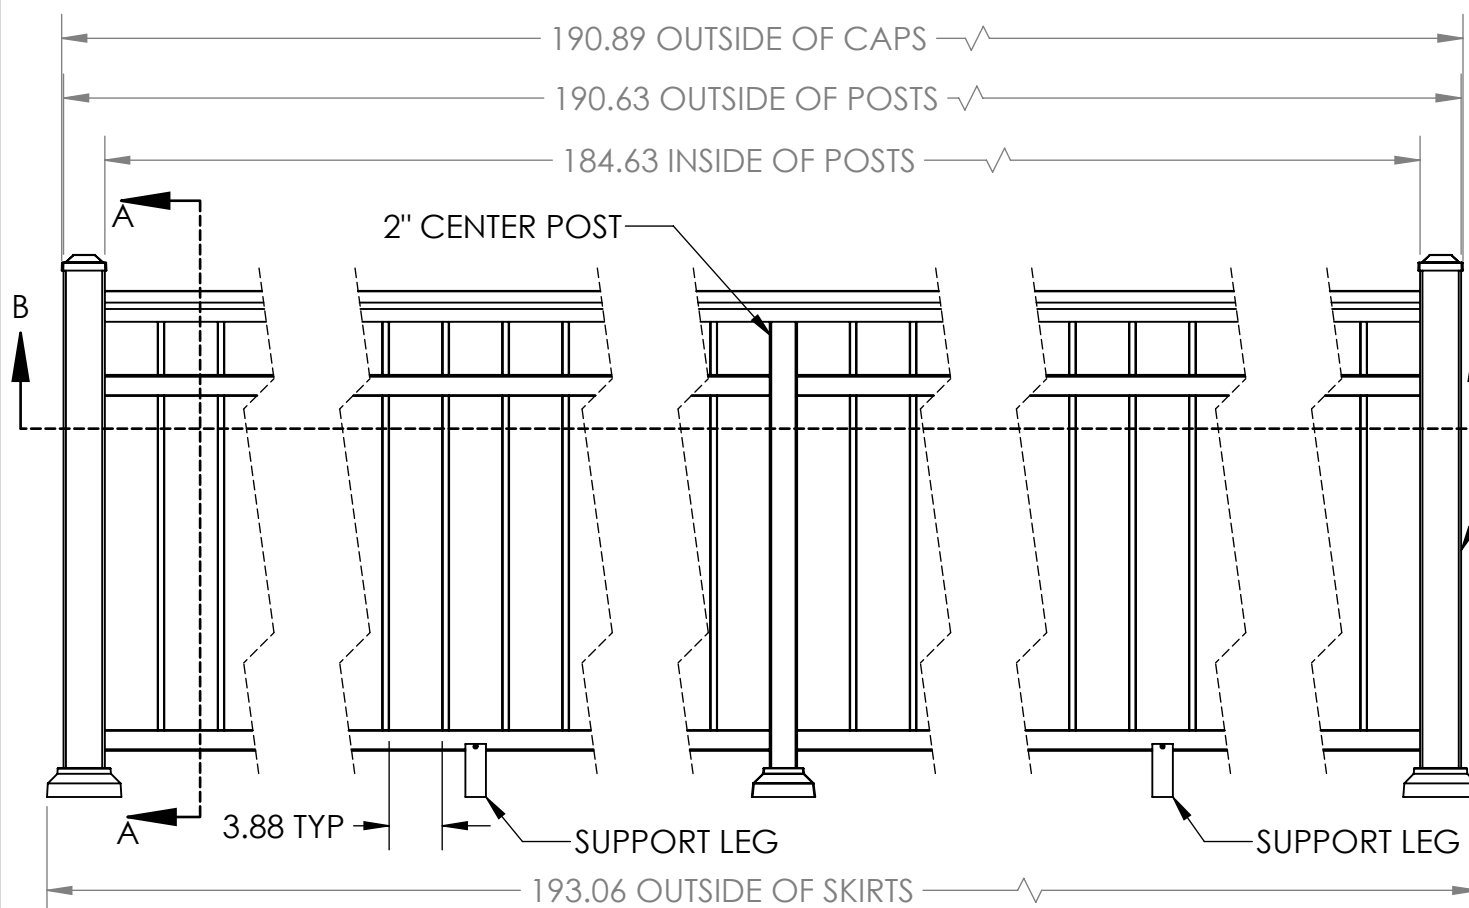

SECTION A-A

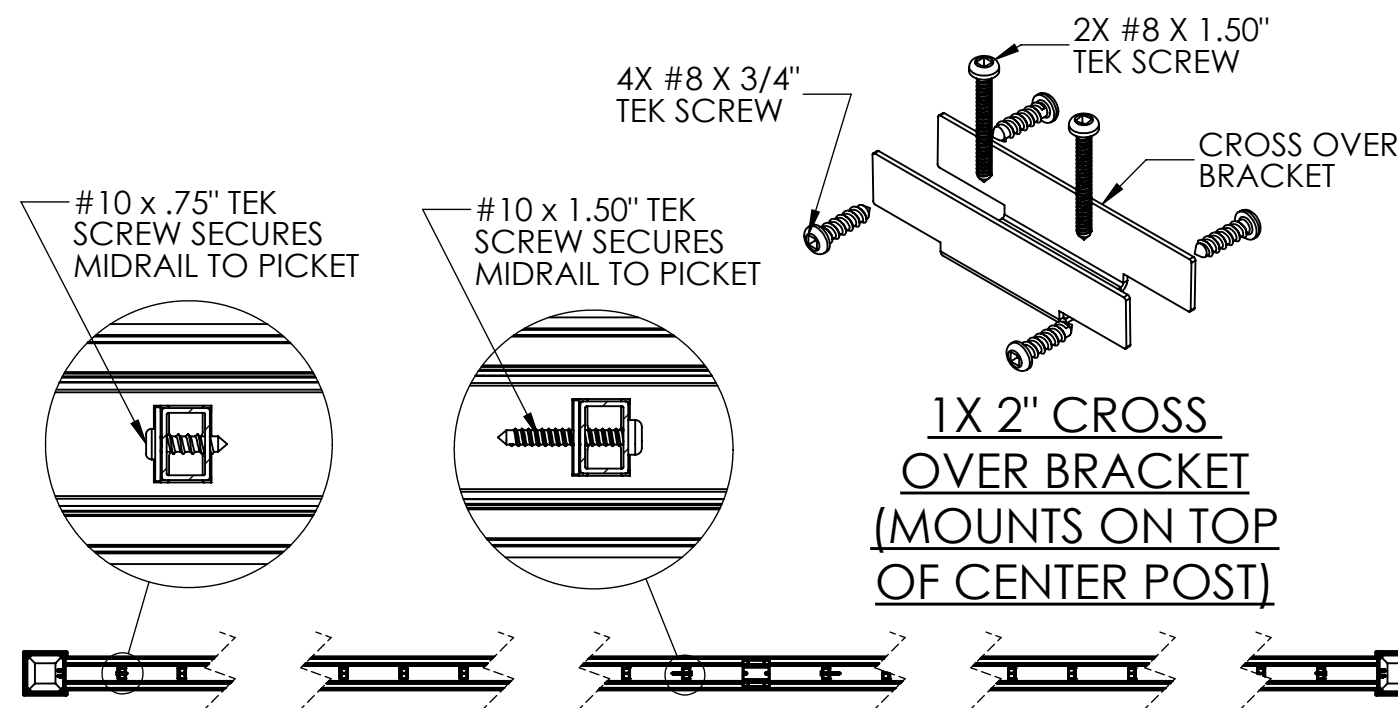

- NOTES:
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.
2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		 ULTRALOX® RAILING SYSTEMS			
DIMENSIONS ARE IN INCHES TOLERANCES: SURFACE FINISH: 125 RMS ANGULAR: ±.5 DEG LINEAR: .X ±.02 .XX ±.010 .XXX ±.005		DRAWN		DRC		6/2/20			
		CHECKED							
		ENG APPR.							
		MFG APPR.							
THIRD ANGLE PROJECTION: 		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009				TITLE: COMBINATION 36" TOP RAIL PICKET WITH MID RAIL - 3" END POSTS 2" MIDDLE POSTS - BASE MOUNT 8' SECTIONS			
MATERIAL		PROPRIETARY AND CONFIDENTIAL							
FINISH		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.							
DO NOT SCALE DRAWING				SIZE B		DWG. NO.		REV A	
						WEIGHT:		SHEET 1 OF 1	

4

3

2

1