






4

3


2

1

REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		4/27/2020	ZAG

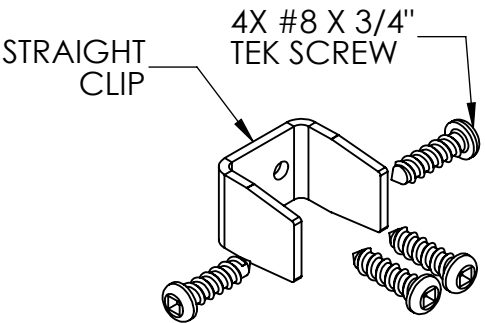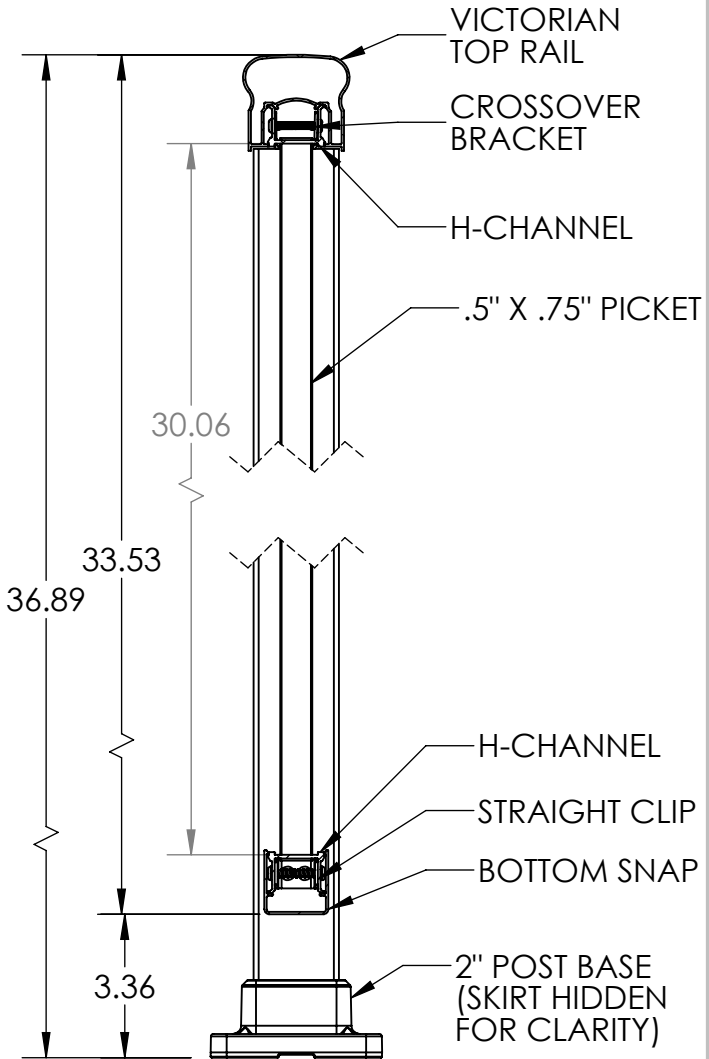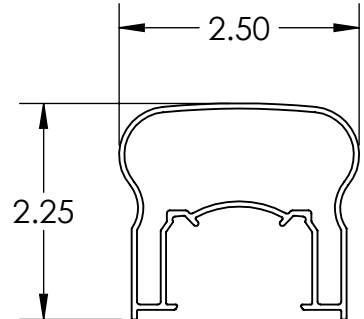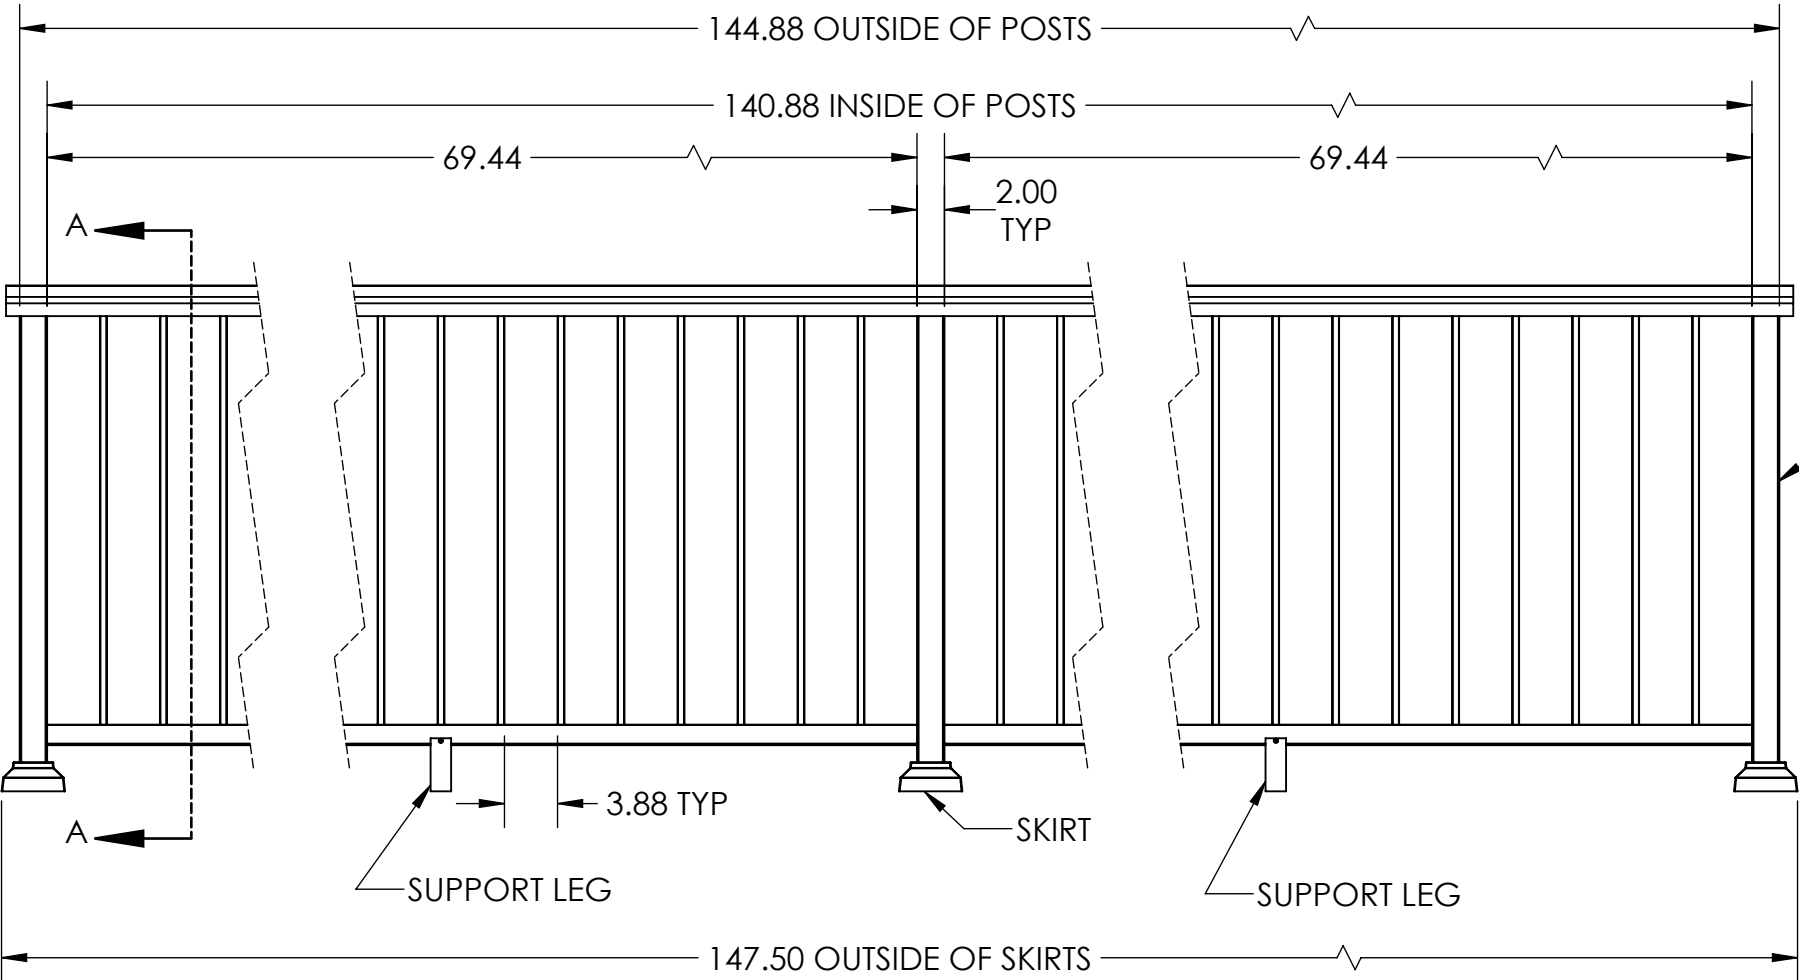

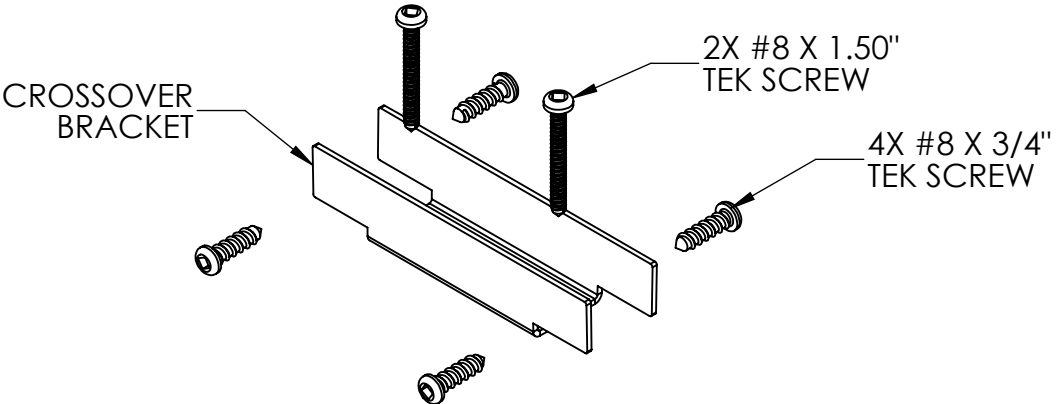

4X CLIP DETAIL



3X 2" CROSSOVER BRACKET  
(MOUNTS ON TOP OF POSTS)

NOTES:  
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.  
2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 <b>ULTRALOX<sup>®</sup></b> RAILING SYSTEMS			
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	DRC	4/27/20	TITLE:  CONTINUOUS 36" TOP RAIL PICKET INFILL 2" POSTS - BASE MOUNT 6' SECTIONS		
SURFACE FINISH: 125 RMS		CHECKED					
ANGULAR: ±.5 DEG		ENG APPR.					
LINEAR: .X ±.02		MFG APPR.					
.XX ±.010 .XXX ±.005							
THIRD ANGLE PROJECTION:		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009					
MATERIAL	<b>PROPRIETARY AND CONFIDENTIAL</b>				SIZE	DWG. NO.	REV
FINISH	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.				<b>B</b>		<b>A</b>
DO NOT SCALE DRAWING						WEIGHT:	SHEET 1 OF 1

TITLE:

CONTINUOUS 36" TOP RAIL  
PICKET INFILL  
2" POSTS - BASE MOUNT  
6' SECTIONS

4

3

2

1