

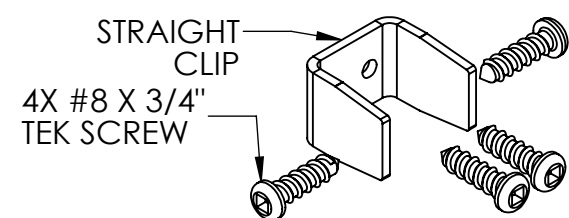
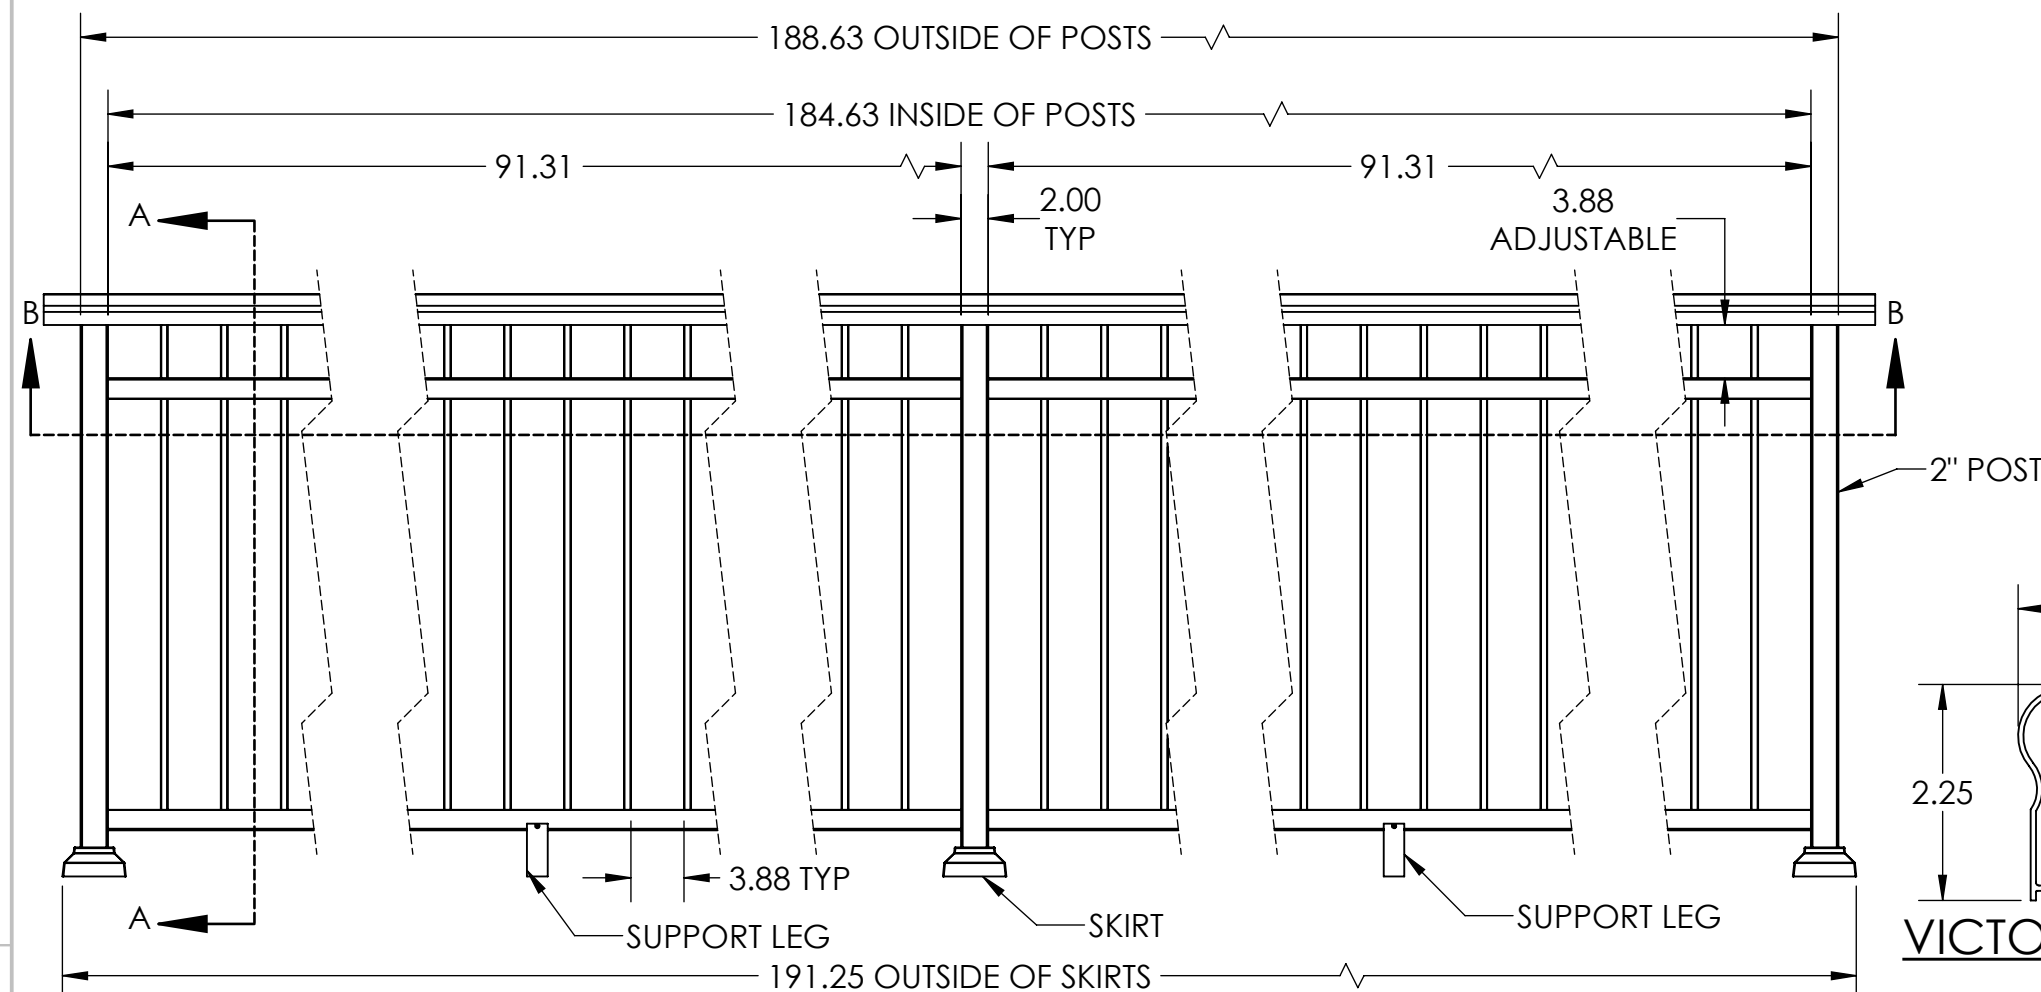
4

3

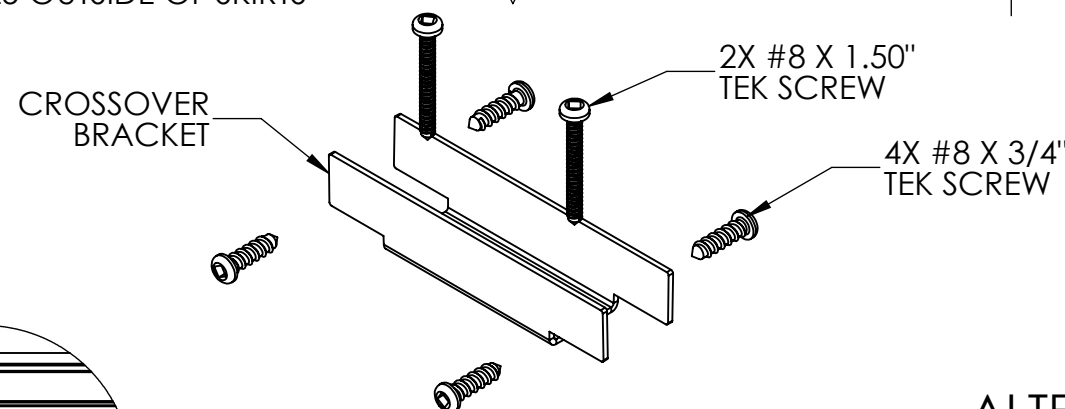

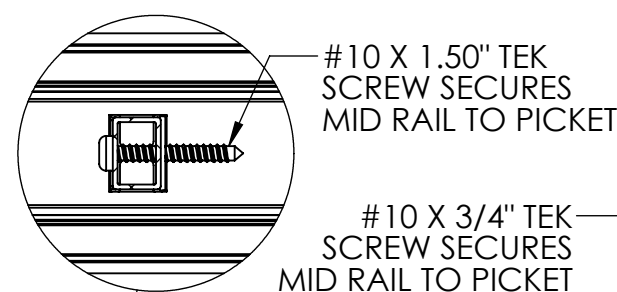
2

1

REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		4/27/2020	ZAG

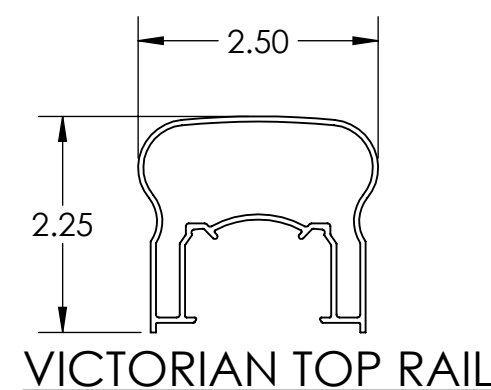


4X CLIP DETAIL

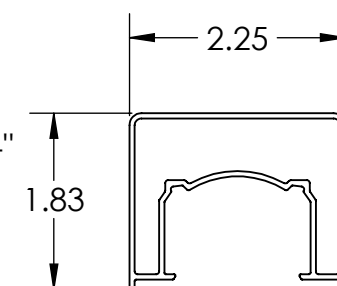
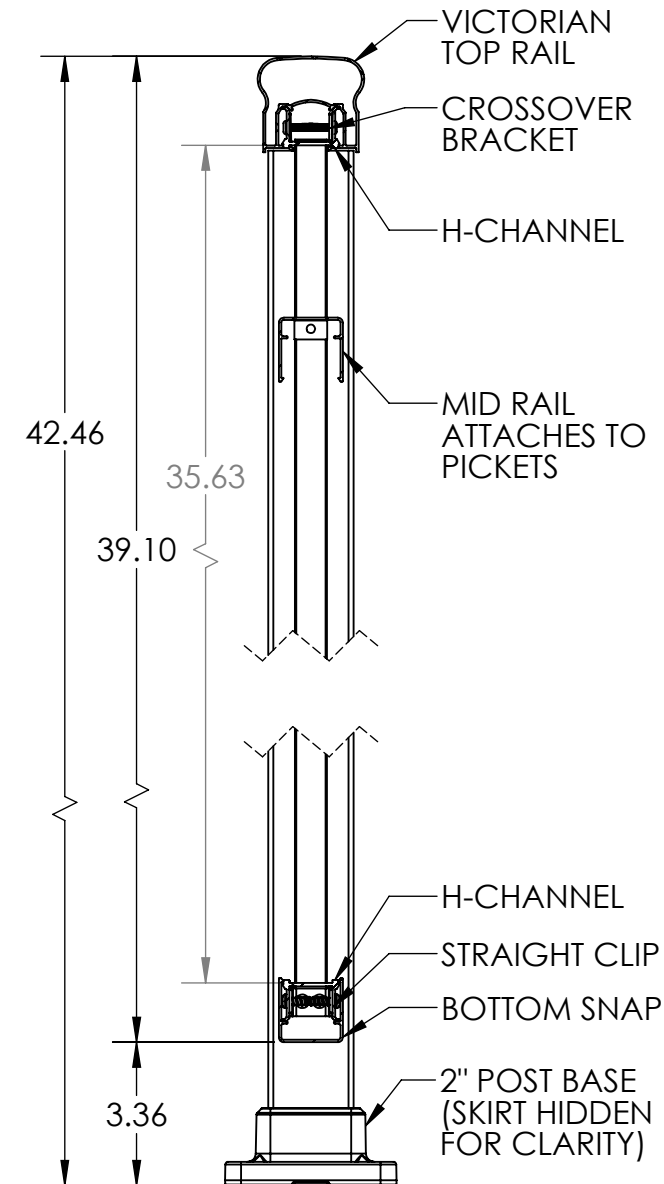
3X 2" CROSSOVER BRACKET
(MOUNTS ON TOP OF POSTS)

SECTION B-B

NOTES:
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.
2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.



VICTORIAN TOP RAIL

ALTA TOP RAIL IS AN
ALTERNATIVE OPTION WITH A
42.04" OVERALL HEIGHT

SECTION A-A

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	ULTRALOX® RAILING SYSTEMS		
DIMENSIONS ARE IN INCHES		DRAWN	4/27/20			
TOLERANCES:		CHECKED				
SURFACE FINISH: 125 RMS		ENG APPR.				
ANGULAR: ±.5 DEG		MFG APPR.				
LINEAR: .X ±.02 .XX ±.010 .XXX ±.005				TITLE: CONTINUOUS 42" TOP RAIL PICKET WITH MID RAIL 2" POSTS - BASE MOUNT 8' SECTIONS		
THIRD ANGLE PROJECTION:		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009				
MATERIAL	PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
FINISH	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.			B		A
DO NOT SCALE DRAWING					WEIGHT:	SHEET 1 OF 1

TITLE:
CONTINUOUS 42" TOP RAIL
PICKET WITH MID RAIL
2" POSTS - BASE MOUNT
8' SECTIONS

4

3

2

1