



4

3


2

1

REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		8/8/2017	ZAG

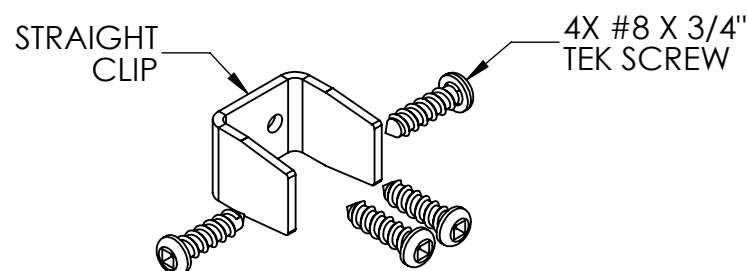
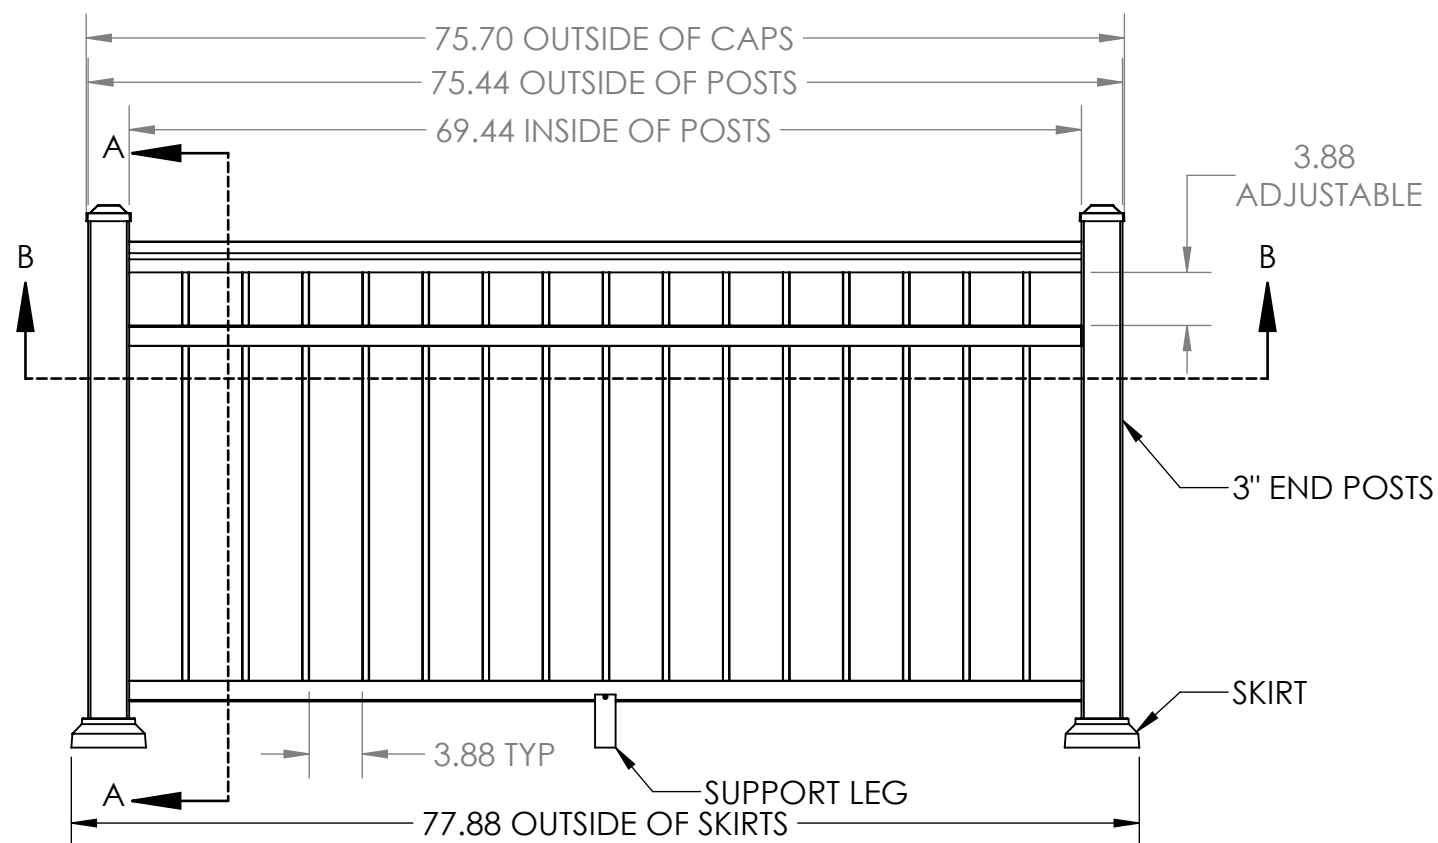


4X CLIP DETAIL

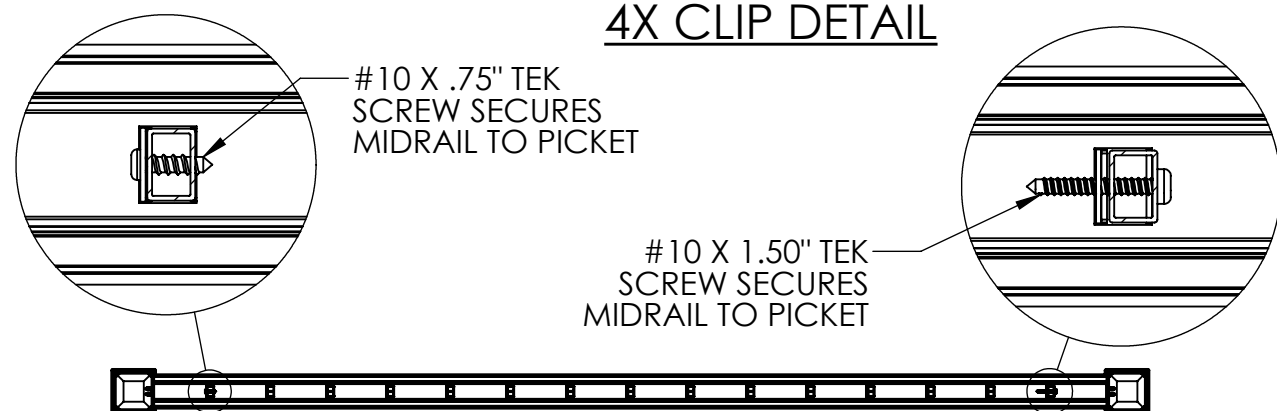


SECTION B-B

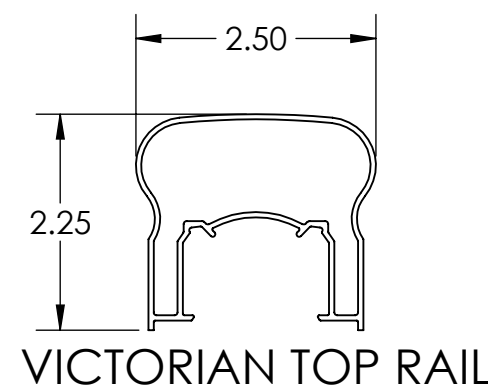

- NOTES:  
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.  
2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.

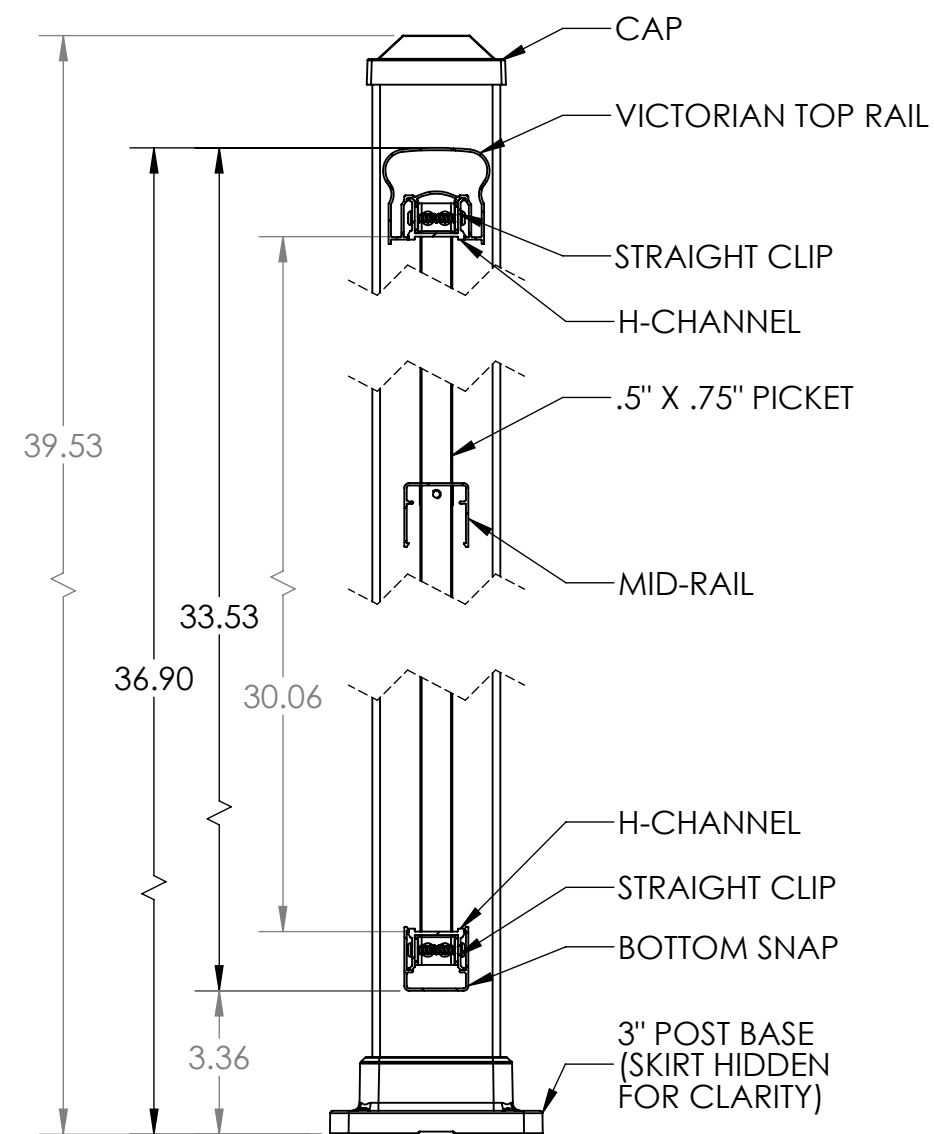

ALTA TOP RAIL IS AN  
ALTERNATIVE OPTION WITH A  
36.48" OVERALL HEIGHT



SECTION A-A

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div> <b>ULTRALOX®</b> RAILING SYSTEMS</div>		
DIMENSIONS ARE IN INCHES		DRAWN	ZAG			8/8/17
TOLERANCES:		CHECKED				
SURFACE FINISH: 125 RMS		ENG APPR.				
ANGULAR: ±.5 DEG		MFG APPR.				
LINEAR: .X ±.02 .XX ±.010 .XXX ±.005					TITLE: POST-TO-POST 36" TOP RAIL PICKET WITH MID RAIL 3" END POSTS - BASE MOUNT 6' SECTION	
THIRD ANGLE PROJECTION: 		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009				
MATERIAL		PROPRIETARY AND CONFIDENTIAL				
FINISH		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.				
DO NOT SCALE DRAWING						
		SIZE <b>B</b>	DWG. NO.		REV <b>A</b>	
		SCALE: 1:10 WEIGHT:			SHEET 1 OF 1	



TITLE:  
POST-TO-POST 36" TOP RAIL  
PICKET WITH MID RAIL  
3" END POSTS - BASE MOUNT  
6' SECTION

4

3

2

1