






REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		8/8/2017	ZAG

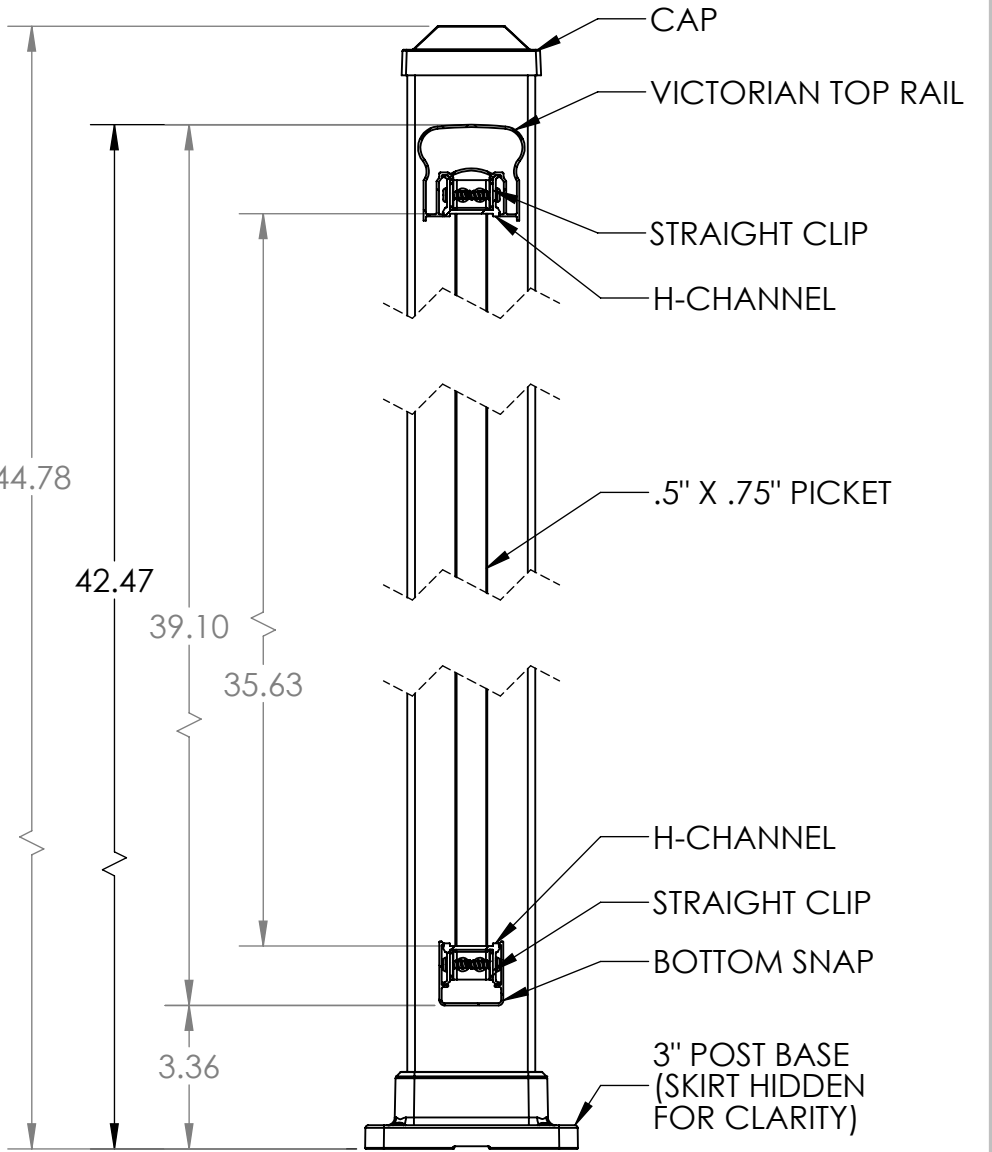


SECTION A-A

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 ULTRALOX® RAILING SYSTEMS		
DIMENSIONS ARE IN INCHES TOLERANCES: SURFACE FINISH: 125 RMS ANGULAR: ±.5 DEG LINEAR: .X ±.02 .XX ±.010 .XXX ±.005		DRAWN	ZAG	8/8/17	TITLE: POST-TO-POST 42" TOP RAIL PICKET INFILL - 3" END POSTS BASE MOUNT - 6' SECTION	
		CHECKED				
		ENG APPR.				
		MFG APPR.				
THIRD ANGLE PROJECTION: 		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009				
MATERIAL		PROPRIETARY AND CONFIDENTIAL			SIZE DWG. NO.	REV
FINISH		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.			B	A
DO NOT SCALE DRAWING					WEIGHT:	SHEET 1 OF 1

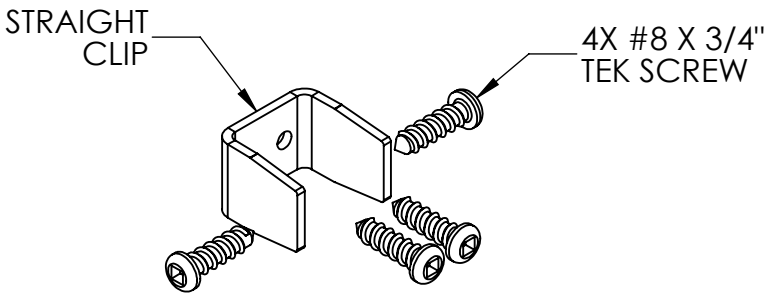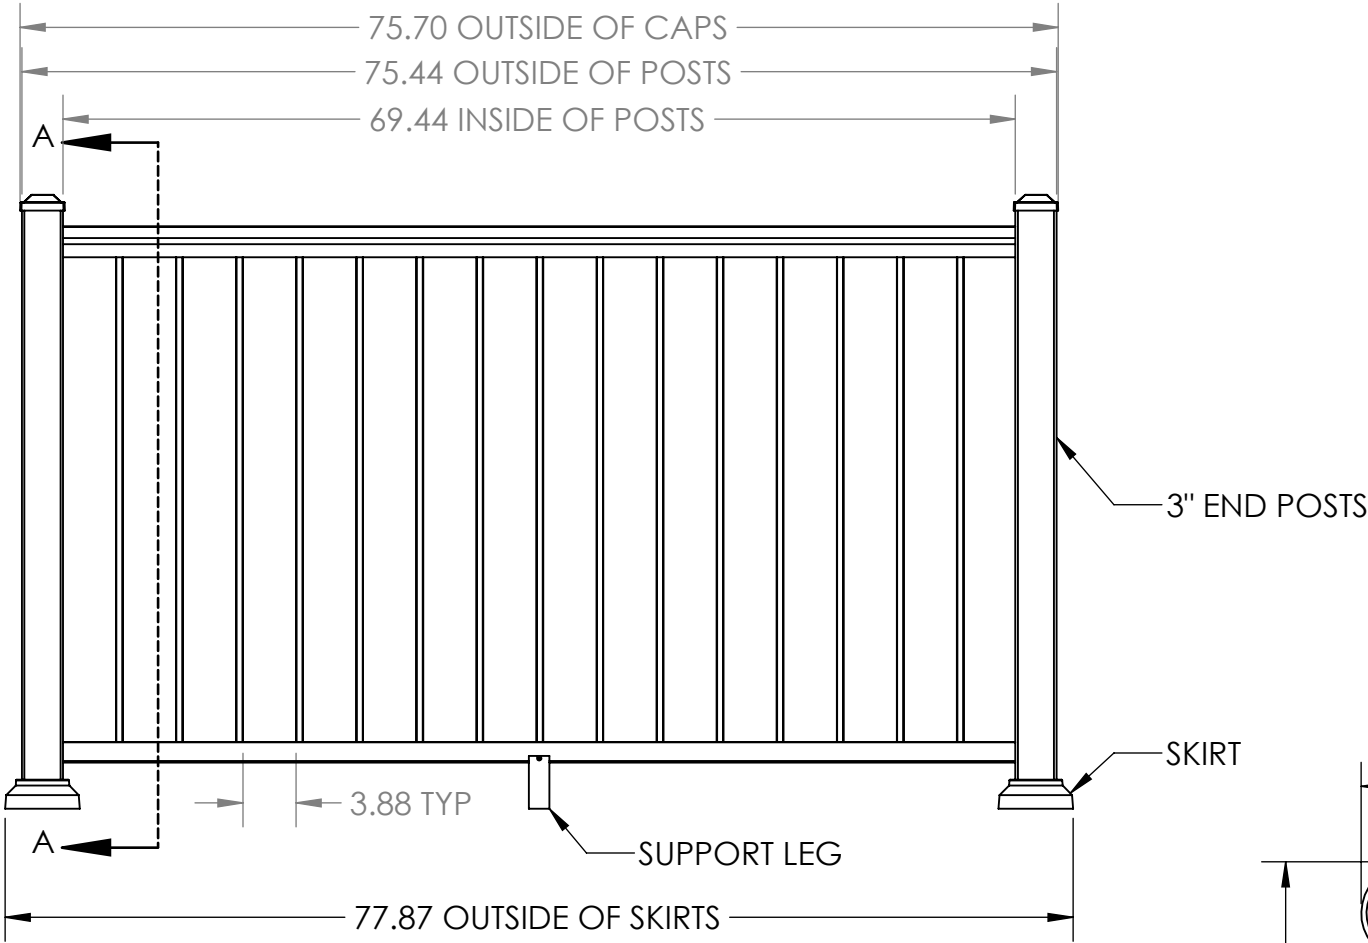

4X CLIP DETAIL

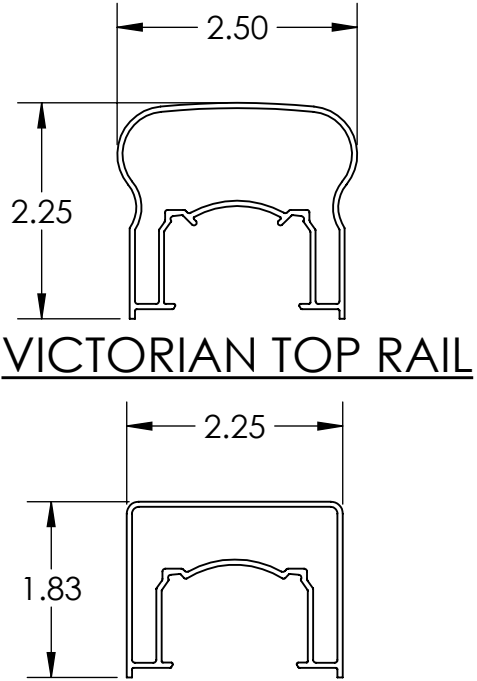

VICTORIAN TOP RAIL

ALTA TOP RAIL IS AN
ALTERNATIVE OPTION WITH A
42.05" OVERALL HEIGHT

NOTES:
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.
2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.