

4

3



2

1



REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		4/14/20	ZAG

B

A

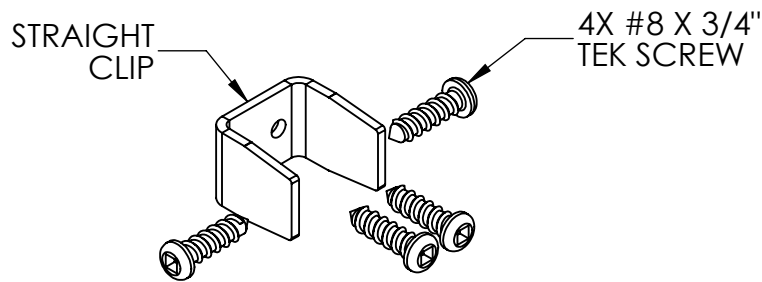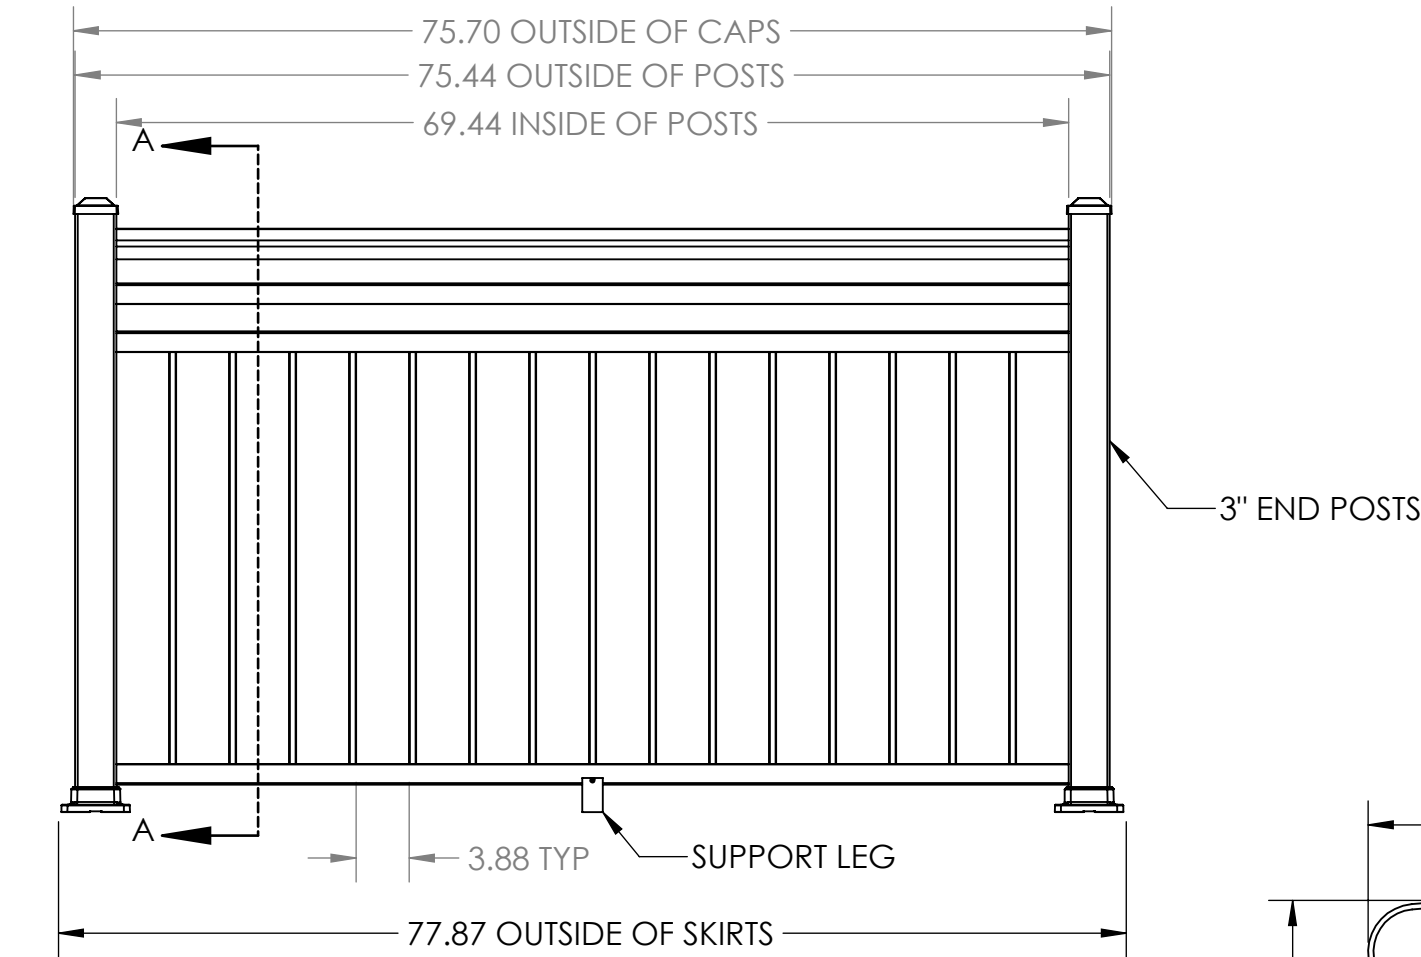

6X CLIP DETAIL

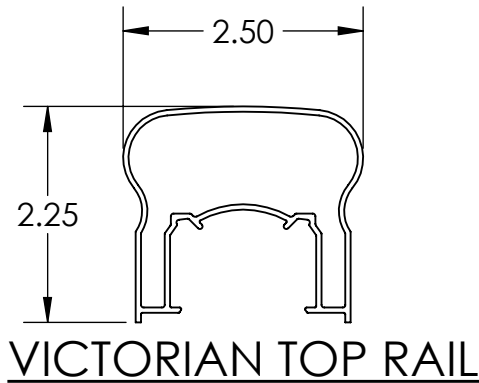


ALTA TOP RAIL IS AN
ALTERNATIVE OPTION WITH A
42.13" OVERALL HEIGHT



- NOTES:
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.
 2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.

B

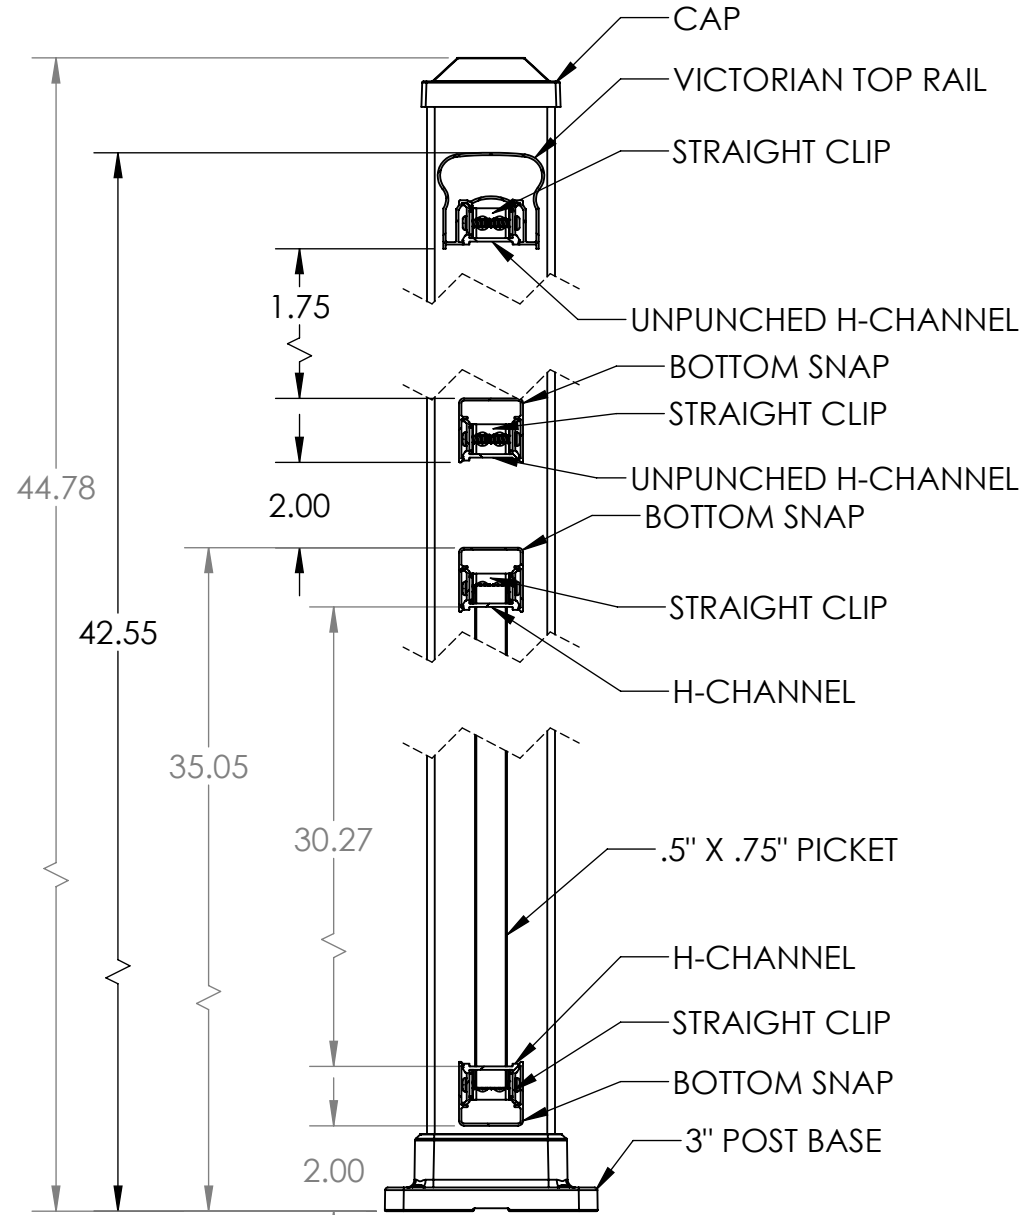A



SECTION A-A

UNLESS OTHERWISE SPECIFIED:		NAME	DATE			ULTRALOX® RAILING SYSTEMS				
DIMENSIONS ARE IN INCHES TOLERANCES: SURFACE FINISH: 125 RMS ANGULAR: ±.5 DEG LINEAR: .X ±.02 .XX ±.010 .XXX ±.005		DRAWN	DRC	4/14/20	TITLE: POST-TO-POST 42" TOP RAIL PICKET WITH DOUBLE OPEN MID RAIL 3" POSTS - BASE MOUNT 6' SECTION - 2" BOTTOM GAP					
		CHECKED								
		ENG APPR.								
		MFG APPR.								
THIRD ANGLE PROJECTION: 		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009			SIZE B			DWG. NO.		REV A
MATERIAL		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.								
FINISH										
DO NOT SCALE DRAWING							WEIGHT:		SHEET 1 OF 1	

4

3

2

1