

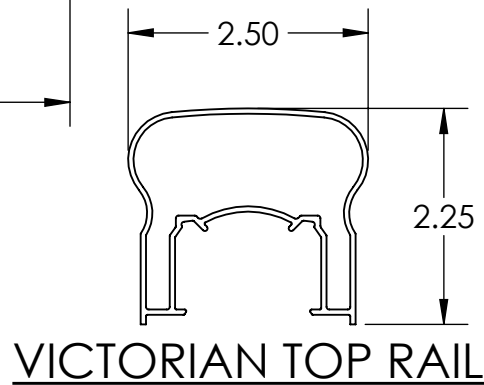


4


3

2

1

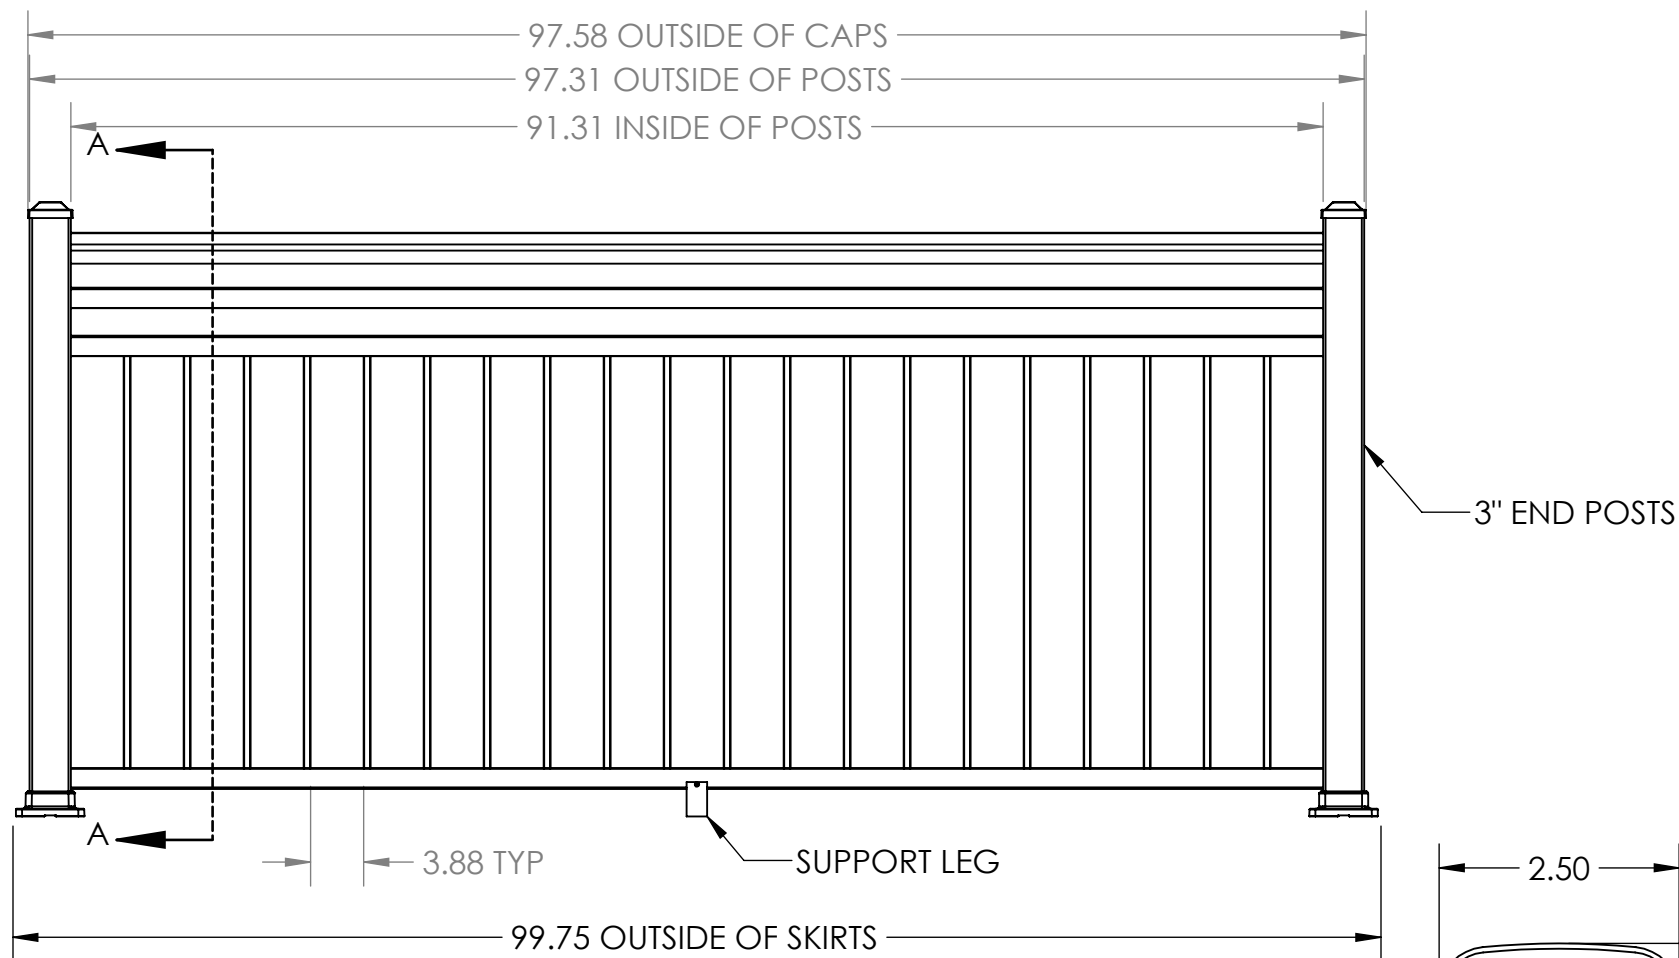


**ALTA TOP RAIL IS AN
ALTERNATIVE OPTION WITH A
42.13" OVERALL HEIGHT**

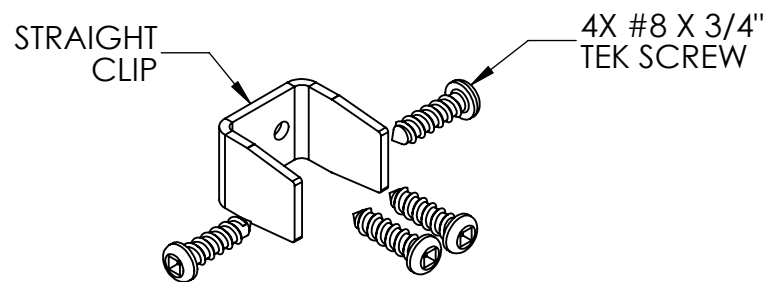



6X CLIP DETAIL

NOTES:
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.
2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.

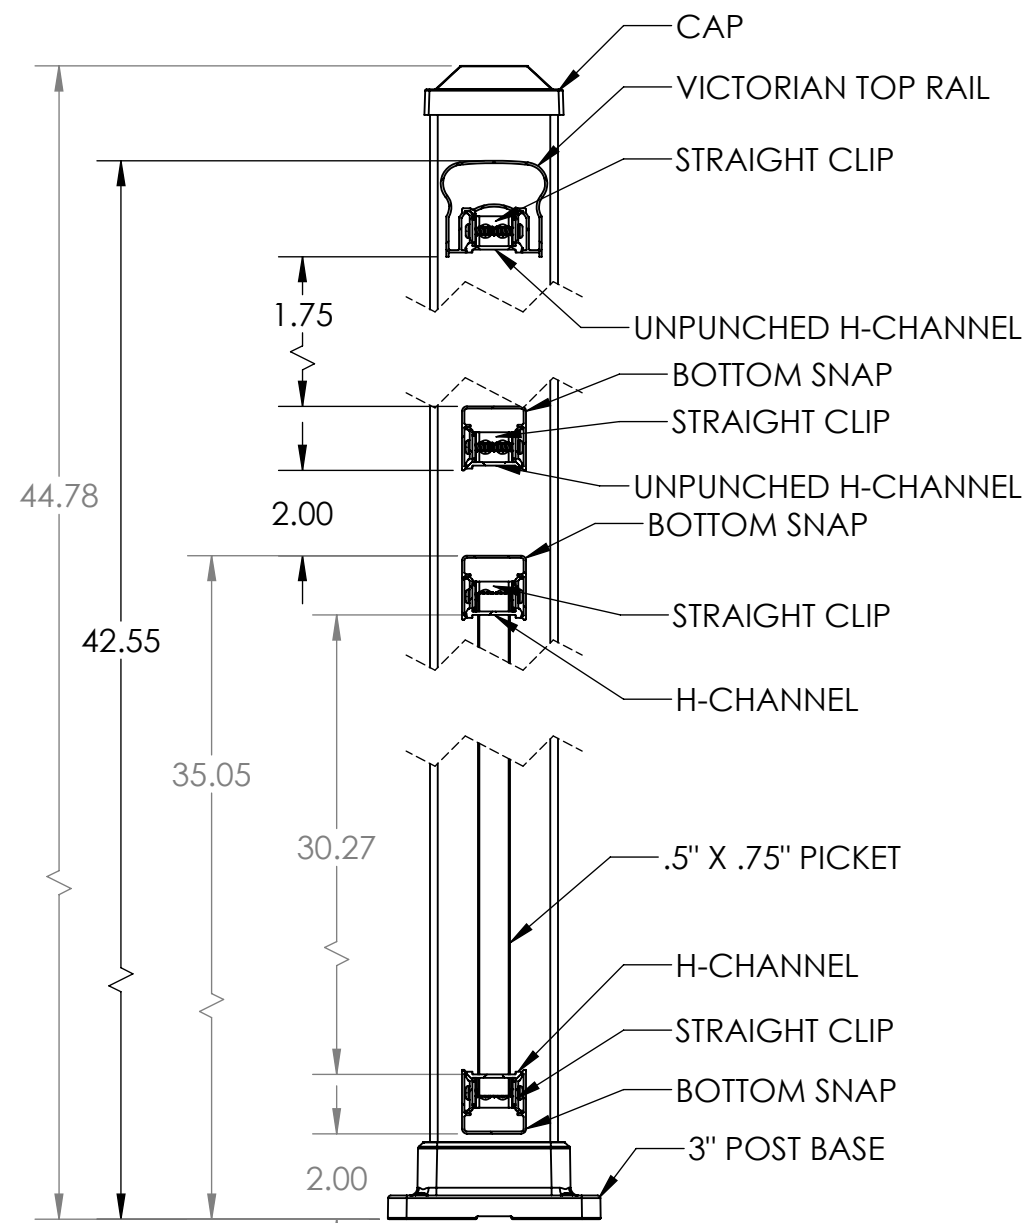REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		4/14/20	ZAG



SECTION A-A

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div> ULTRALOX® RAILING SYSTEMS</div>			
DIMENSIONS ARE IN INCHES TOLERANCES: SURFACE FINISH: 125 RMS ANGULAR: ±.5 DEG LINEAR: .X ±.02 .XX ±.010 .XXX ±.005		DRAWN	DRC	4/14/20	TITLE: POST-TO-POST 42" TOP RAIL PICKET WITH DOUBLE OPEN MID RA 3" POSTS - BASE MOUNT 8' SECTION - 2" BOTTOM GAP		
		CHECKED					
		ENG APPR.					
		MFG APPR.					
THIRD ANGLE PROJECTION:		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009			SIZE B	DWG. NO.	REV A
MATERIAL		PROPRIETARY AND CONFIDENTIAL					
FINISH		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.					
DO NOT SCALE DRAWING							
		WEIGHT:			SHEET 1 OF 1		