



4

3


2

1

REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		8/8/2017	ZAG

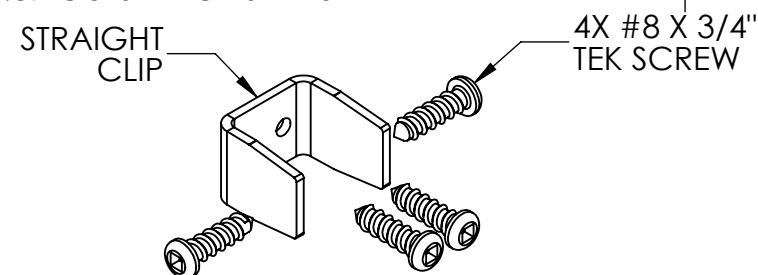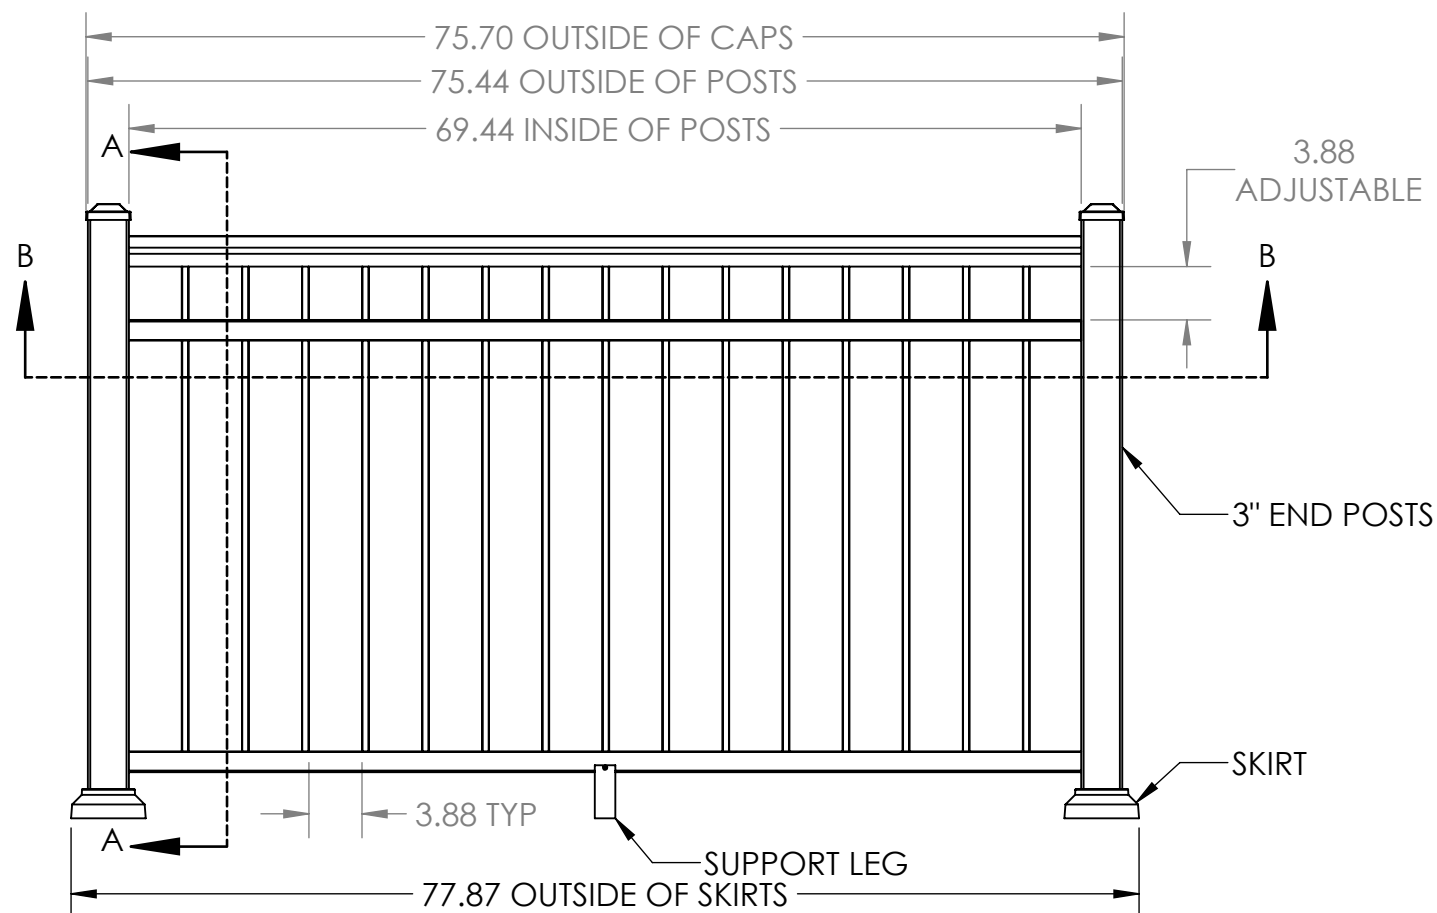

4X CLIP DETAIL






#10 X 1.50" TEK SCREW SECURES MIDRAIL TO PICKET



SECTION B-B

- NOTES:
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.
2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.

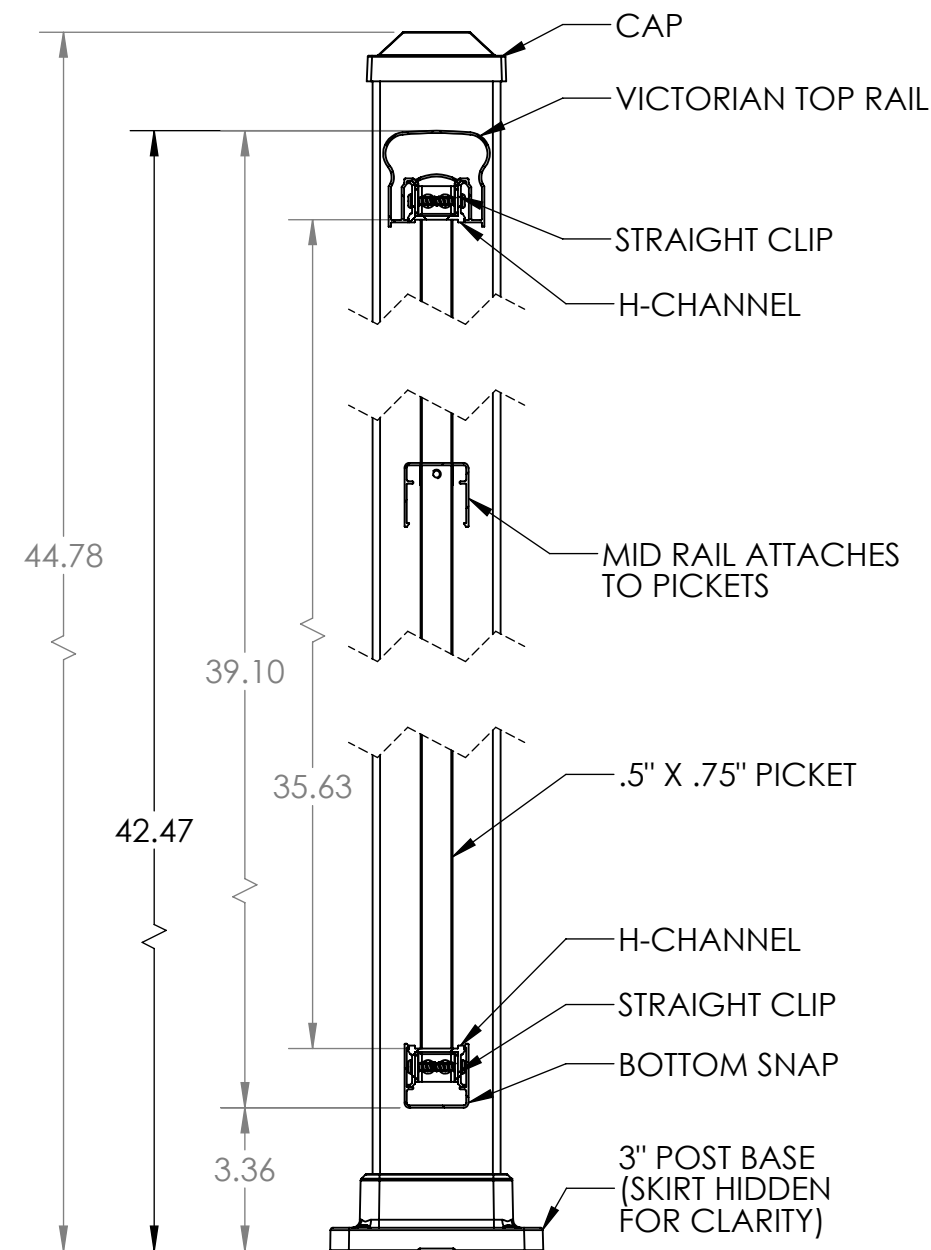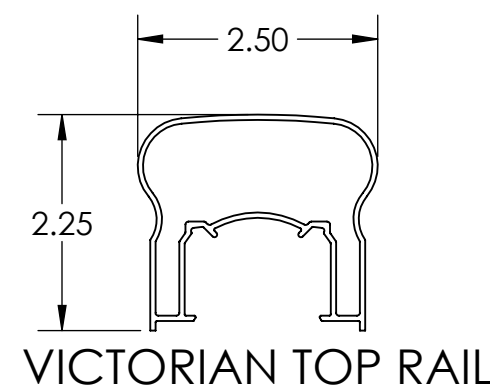

SECTION A-A

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 ULTRALOX® RAILING SYSTEMS					
DIMENSIONS ARE IN INCHES TOLERANCES: SURFACE FINISH: 125 RMS ANGULAR: ±.5 DEG LINEAR: .X ±.02 .XX ±.010 .XXX ±.005		DRAWN	ZAG			8/8/17			
THIRD ANGLE PROJECTION: 		CHECKED		TITLE: POST-TO-POST 42" TOP RAIL PICKET WITH MID RAIL 3" END POSTS - BASE MOUNT 6' SECTION					
		ENG APPR.							
		MFG APPR.							
MATERIAL		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009		SIZE B		DWG. NO.		REV A	
FINISH		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.							
DO NOT SCALE DRAWING									
						WEIGHT:		SHEET 1 OF 1	



TITLE:
POST-TO-POST 42" TOP RAIL
PICKET WITH MID RAIL
3" END POSTS - BASE MOUNT
6' SECTION