

4




3

2

1


REVISIONS - BALLOONS DENOTE CHANGES			
REV.	DESCRIPTION	DATE	APPROVED
A		4/13/2020	ZAG

B

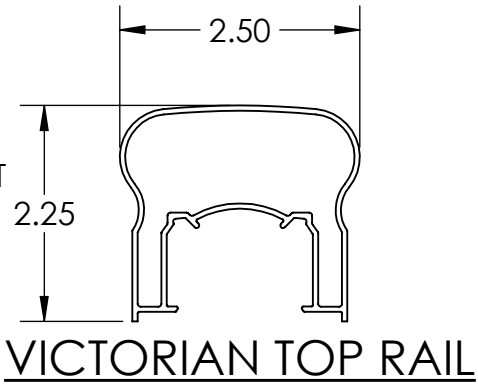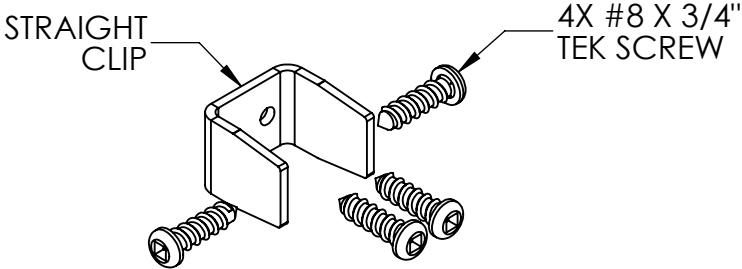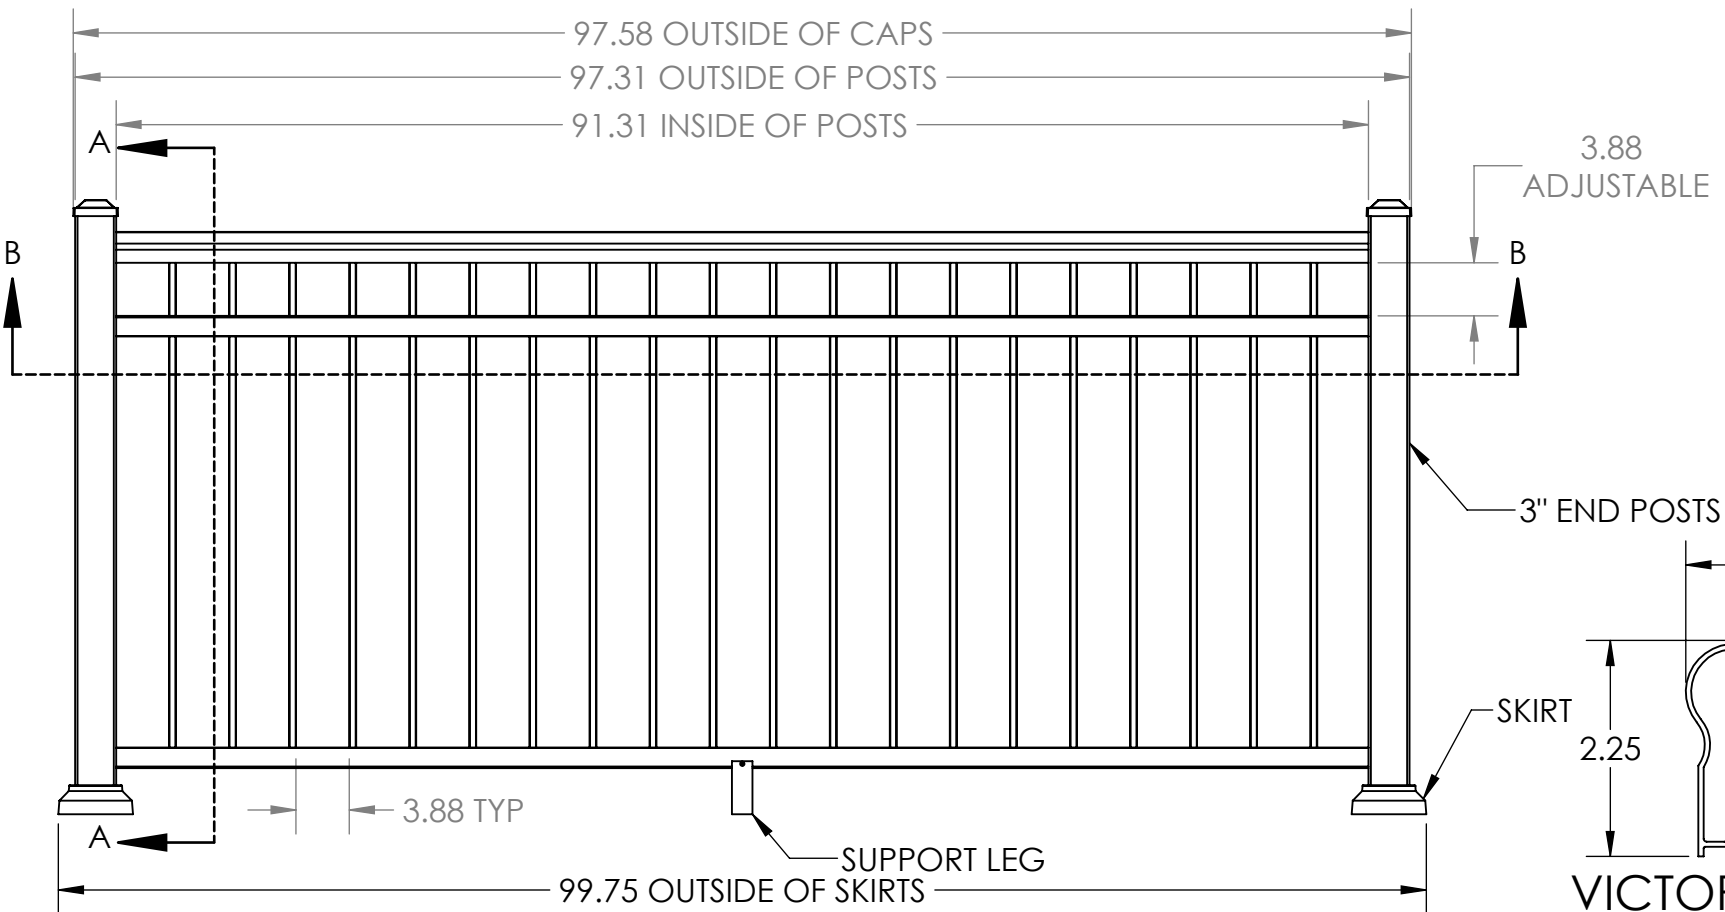


ALTA TOP RAIL IS AN
ALTERNATIVE OPTION WITH A
42.05" OVERALL HEIGHT


B

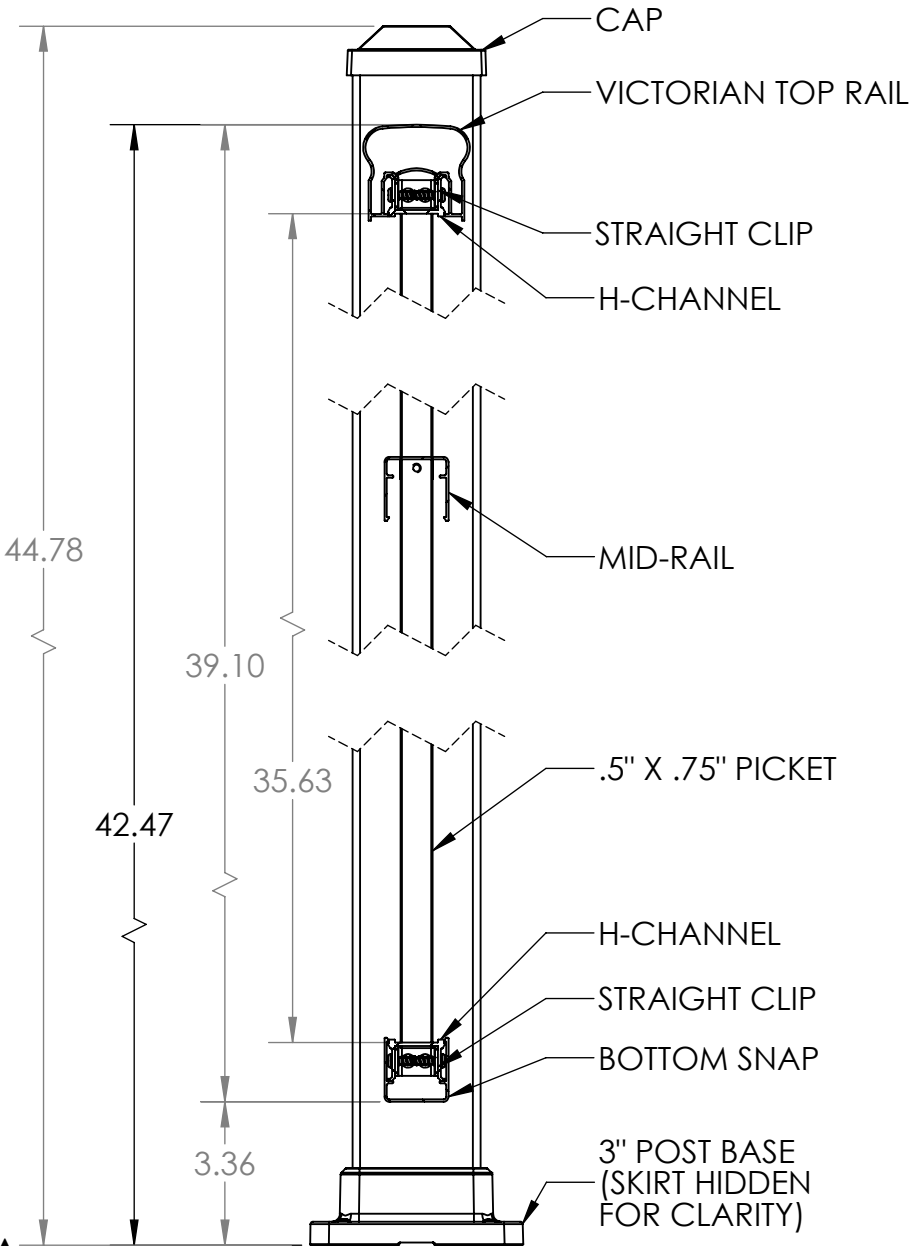

SECTION A-A



#10 X .75" TEK
SCREW SECURES
MIDRAIL TO PICKET





#10 X 1.50" TEK
SCREW SECURES
MIDRAIL TO PICKET



SECTION B-B

- NOTES:
1. ALL RAIL MUST BE ASSEMBLED AND FASTENED IN ACCORDANCE WITH ULTRALOX'S INSTALLATION INSTRUCTIONS.
 2. AVAILABLE COLORS ARE BLACK - WHITE - BRONZE.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 ULTRALOX® RAILING SYSTEMS	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	DRC	4/13/20	
SURFACE FINISH: 125 RMS		CHECKED			
ANGULAR: ±.5 DEG		ENG APPR.			
LINEAR: .X ±.02		MFG APPR.			
.XX ±.010					
.XXX ±.005					
THIRD ANGLE PROJECTION: 		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009		TITLE: POST-TO-POST 42" TOP RAIL PICKET WITH MID RAIL 3" END POSTS - BASE MOUNT 8' SECTION	
MATERIAL		PROPRIETARY AND CONFIDENTIAL		SIZE	DWG. NO.
FINISH		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UltraLox. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UltraLox.		B	REV A
DO NOT SCALE DRAWING				WEIGHT: SHEET 1 OF 1	

4

3

2

1

A